ENVIRONMENTAL MANAGEMENT PROGRAMME (EMPr.) FOR THE CONSTRUCTION OF THE NEW REFUELING FACILITY AND DECOMMISSIONING OF THE EXISTING REFUELING INFRASTRUCTURE AT THE BEACONSFIELD DEPOT, KIMBERLEY IN SOL PLAATJIE LOCAL MUNICIPALITY, NORTHERN CAPE

02 February 2023

Prepared by: Odwa Ntshanga & Beverly Lukoto Reviewed by: Vuyokazi April

For Submission to: Department of Forestry, Fisheries & Environment

Cnr. Steve Biko and Soutspansberg Road

473 Steve Biko, Arcadia

Pretoria, 0083

Tel: 086 1112468

Prepared on behalf of: Transnet Soc Ltd

15 Girton Road, Parktown

Inyanda House 2

Johannesburg

Tel: 011 584 0528



Table of Contents

1. INT	FRODUCTION	1
1.1 E	Background	1
1.2 (Objectives of the EMPr	1
1.3 \$	Structure of the EMPr	4
1.4	Legal Framework and Components of the EMPr	6
2. DE1	TAILS AND EXPERTISE OF THE ENVIRONMENTAL ASSESSMENT PRAC	CTITIONER
(EAP).)	7
2.1 [Details of the EAP	7
2.2	Expertise of the EAP	7
3. DE1	TAILS OF THE PROPOSED ACTIVITY	9
3.1 I	Project Description	9
3.	.1.1 Infrastructure	9
3.2	Property Description	10
4. SC(OPE OF THE EMPr	12
4.1	Layout of the EMPr	12
4.	.1.1 Planning and Design Phase	12
4.	.1.2 Construction Phase	12
4.	.1.3 Operational and Maintenance Phase	12
4.	.1.4 Closure and Post Closure Phase	13
5. ROI	LES AND RESPONSIBILITIES	14
5.1	The Applicant – Transnet SOC Ltd	14
5.2	The Contractor	15
5.3	Environmental Control Officer (ECO)	16
5.4	Competent Authority	17
6. COI	MPLIANCE WITH THE EMPr	19

	6.1 Non-Compliance	19
	6.2 Penalties	20
7.	ENVIRONMENTAL SPECIFICATIONS: PRE- CONSTRUCTION, CONSTRUCTION AND)
O	PERATION PHASES	21
8.	ENVIRONMENTAL AWARENESS TRAINING	57
9.	AMENDMENTS TO THE EMPR	57

LIST OF ACRONYMS USED IN THIS DOCUMENT

BA	Basic Assessment
BAR	Basic Assessment Report
DEA	Department of Forestry, Fisheries and Environment
DWS	Department of Water and Sanitation
EAP	Environmental Assessment Practitioner
ECO	Environmental Control Officer
EIA	Environmental Impact Assessment
EMPr	Environmental Management Programme (this document)
EMS	Environmental Management Systems
I&APs	Interested & Affected Parties
IDP	Integrated Development Plan
ISO	International Organisation for Standardisation
NEMA	National Environmental Management Act
NHRA	National Heritage Resources Agency
NWA	National Water Act
PA	Principal Agent
PM	Project Manager
PHRA-G	Provincial Heritage Resources Authority Gauteng
SAHRA	South African Heritage Resources Agency
SDF	Spatial Development Framework

DEFINITIONS USED IN THIS EMPr

The definitions contained within this document are for explanatory purposes only. In the event

that any conflict occurs between the definitions herein and those contained within the final

Contract, those within the Contract shall prevail.

Alien Species/Vegetation: Declared weeds and invader plant species have the tendency to

dominate or replace the canopy or herbaceous layer of natural ecosystems, thereby

transforming the structure, composition and function of natural ecosystems.

Batching area: Site for the large-scale mixing and production of concrete or plaster, and

associated equipment and materials.

Bunded: Enclosure under / around a storage facility to contain any spillage.

Contaminated Water: means water polluted by contractor's activities like concrete water and

run-off from plant/ personnel wash areas.

Contract: means the general conditions of contract and special conditions, specifications,

drawings, tender, written records of matters agreed after submission of the Contractor's tender,

letter of acceptance and agreement, together with other documents which the parties have

agreed in writing shall form part of the contract and such amendments or additions to the contract

as may be agreed in writing between the parties.

Contractor: refers to the person/company awarded the contract to undertake the proposed

work. For the purposes of this EMPr "Contractor" also refer to the person (s) undertaking any of

the proposed activities whether awarded a contract or not.

Construction Camp: refers to the area for temporary site offices, storage and stockpile sites,

staff accommodation, container sites, workshops and testing facilities, and other areas required

to undertake construction activities.

Prepared by IKAMVA Consulting

<u>Designated Environmental Officer (DEO)</u>: is the site-based designated person responsible for implementing the environmental provisions of the Construction Contract and is appointed by the service provider that carries out construction activities. The DEO shall be the designated responsible person, for implementing any remedial measures as required from time to time and for any authorizations/licences that are required in terms of the service contract. The DEO shall record and communicate environmental issues (as they occur) to the Contractor and maintain records thereof. The DEO shall report concurrently to the contractor and the ECO.

Engineer: A person representing the Developer/Implementer on site and who is responsible for the technical and contractual implementation of the works to be undertaken. This is usually the engineer, but may be any other person, such as an architect or project manager, authorized by the Developer to fulfill this role.

<u>Environmental Control Officer (ECO)</u>: A suitably qualified and experienced person or entity appointed for the Construction Works, to perform the obligations specified in the environmental authorisation. The ECO's duties shall include, inter alia:

- Confirming that all required environmental authorizations and permits, where necessary, have been obtained from the relevant authorities;
- Monitoring all activities relating to the project, on a daily basis (or as agreed), for compliance with the provisions of the environmental authorisation, environmental legislation and recommendations of the EMP;
- Conducting annual environmental performance audits in respect of the activities undertaken relating to the project.

Environmental Aspect: An environmental aspect is any component of a contractor's construction activity that is likely to interact with the environment.

Environmental Authorisation: A written statement from the relevant environmental authority, with or without conditions, that records its approval of a planned undertaking to build the accommodation facilities and other associated structures and infrastructure and the mitigating measures required to prevent or reduce the effects of environmental impacts during the life of a contract.

Environmental Impact: An impact or environmental impact is the change to the environment, whether desirable or undesirable, that will result from the effect of a construction activity. An impact may be the direct or indirect consequence of a construction activity.

<u>Environmental Impact Assessment:</u> The process of examining the environmental effects of a proposed development.

<u>Environmental Management System:</u> The internationally accepted and recognized environmental management system (EMS) which enables companies, organizations and operations to systematically manage, prevent and reduce environmental problems and associated costs. In terms of ISO 14001 an EMS is defined as, "that part of the overall management system includes organizational structure, planning activities, responsibilities, procedures, processes and resources for developing, implementing, reviewing and maintaining the environmental policy."

Environmental Policy: A statement by the organisation of its intentions and principles in relation to its overall environmental performance which provides a framework for action and for the setting of its environmental objectives and targets.

Environment: means the surroundings within which humans exist and that are made up of-

- I. The land, water and atmosphere of the earth;
- II. Micro-organisms, plant and animal life;
- III. Any part or combination of i) and ii) and the interrelationships among and between them; and
- IV. The physical, chemical, aesthetic and cultural properties and conditions of the foregoing that influence human health and well-being.

<u>Interested and Affected Party:</u> Refers to an interested and affected party contemplated in section 24(4)(d) of the National Environmental Management Act, 1998 (Act No. 107 of 1998) and which in terms of that section includes—

a) Any person, groups of persons, organization interested in or affected by an activity, and; Prepared by IKAMVA Consulting

b) Any organ of state that may have jurisdiction over any aspect of the activity.

Method Statement: is a written submission that describes the scope of the intended work in a step-by-step description in order for the Environmental Officer and Engineer to understand the Contractor's intentions. This will enable them to assist in devising any mitigation measures, which would minimize environmental impact during these tasks. For each instance wherein it is requested that the Contractor submit a method statement to the satisfaction of the Engineer and ECO, the format should indicate the following:

- What a brief description of the work to be undertaken;
- How a detailed description of the process of work, methods and materials;
- Where a description/sketch map of the locality of work (if applicable); and
- When the sequencing of actions with due commencement dates and completion dates estimates.

The Contractor must submit the method statement before any particular construction activity is due to start. Work may not commence until the method statement has been approved by both the Engineer and ECO.

<u>Mitigate:</u> The implementation of practical measures to reduce the adverse impacts, or to enhance beneficial impacts of a particular action.

No-Go Area: Areas where construction activities and construction personnel are prohibited.

Pollution: According to the National Environmental Management Act, No. 107 of 1998, pollution can be defined as, "Any change in the environment caused by (i) substances; (ii) radioactive or other waves; or (iii) noise, odors, dust or heat emitted from any activity, including the storage or treatment of waste or substances, construction and the provision of services, whether engaged in by any person or an organ of state, where that change has an adverse effect on human health or well-being or on the composition, resilience and productivity of natural or managed ecosystems, or on materials useful to people, or will have such an effect in the future".

<u>Potential hazardous substance:</u> is a substance that, in the reasonable opinion of the Engineer and/or relevant environmental authority, can have a deleterious effect on the environment.

Rehabilitation: To re-establish or restore to a healthy, sustainable capacity or state.

<u>Species of Special Concern</u>: Those species listed in the Rare, Indeterminate, or Monitoring categories of the South African Red Data Books, and/or species listed in Globally Near Threatened, Nationally Threatened or Nationally Near Threatened categories (Barnes, 1998). Solid waste: means all waste in a solid form, including construction debris, chemical waste, excess cement/concrete, wrapping materials, timber, tins and cans, drums, wire, nails, food and domestic waste.

Threatened species: Threatened species are defined as:

- a) species listed in the Endangered or Vulnerable categories in the revised South African Red Data Books or listed in the Globally Threatened category;
- b) species of special conservation concern (i.e., taxa described since the relevant South African Red Data Books, or whose conservation status has been highlighted subsequent to 1984);
- c) species which are included in other international lists; or d) species included in Appendix 1 or 2 of the Convention of International Trade in Endangered Species (CITES).

<u>Topsoil:</u> The top part of the soil profile and may include top material such as vegetation, plant litter, and rock. This part is distinguished by the dark colour as compared to the pale deeper profiles underneath.

1. INTRODUCTION

1.1 Background

Transnet Freight Rail (TFR) is currently operating a refueling facility at Beaconsfield, Kimberley, Northern Cape. The operations taking place at the facility require a higher storage capacity than what is currently available and therefore to meet the operational needs of the depot, 2 additional mobile tankers are utilized. This process has proven to be inefficient and costly for Transnet Freight Rail (TFR) as it takes up most of the yard space required for the operation. As such a solution is required to ensure the operational efficiency.

TFR proposes construction of a new refueling facility and decommissioning of the existing infrastructure as it will be more beneficial to the operations of the depot. The Environmental Management Programme (EMPr) forms part of the submission of the Basic Assessment Report (BAR) and is in accordance with Appendix 4 of the EIA Regulations, 2017 (as amended).

This EMPr includes the following:

- Background to the proposed development
- Assumptions and uncertainties
- General Objectives and Purpose of the EMPr
- Legal Requirements
- Roles and Responsibilities
- Mitigation and management measures relating to impacts identified with associated timeframes and responsibilities for implementation and monitoring.
- Environmental Awareness Training

1.2 Objectives of the EMPr

The key objectives of this EMPr are to document appropriate actions and to assign responsibility for those actions, to ensure that any impacts resulting from the construction phase and decommissioning phase of the proposed project are minimized and mitigated. This ensures that the basis on which any decision is taken includes environmental considerations and that the

impacts on the surrounding and receiving environment are minimized. This EMPr serves as a stand-alone document to be disseminated to and used by the contractor during the construction phase and by the proponent during operational phase. By its very nature, the EMPr is a dynamic document and updating should occur as and when required.

The purpose of this EMPr is to:

- Outline TFR's environmental management commitments for the site during construction.
- Ensure adherence to all relevant environmental, health and safety legislation;
- Act as a performance standard that activities can be audited against; and
- Ensure that appropriate monitoring is undertaken for the duration of the construction.

The EMPr has been compiled to provide recommendations and guidelines according to which compliance monitoring can be done during the construction and operation of the refueling facility at Beaconsfield as well as to ensure that all relevant factors are considered. This EMPr seeks to inform all relevant parties, which in this case are the Project Manager/Principal Agent, the Contractor, the Environmental Control Officer (ECO) and all other staff employed on site as to their duties in the fulfilment of the legal requirements for the construction of the refueling facility with particular reference to the prevention and mitigation of anticipated potential environmental impacts.

All parties should note that obligations imposed by the EMPr are legally binding in terms of the environmental authorization granted by the relevant Regulatory Authority/Competent Authority, which in this case is the Department of Forestry, Fisheries and Environment (DFFE).

The objectives of an EMPr are to:

- Ensure compliance with regulatory authority stipulations and guidelines which may be local, provincial, national and/or international;
- Verify environmental performance through information on impacts as they occur;
- Respond to unforeseen events;
- Provide feedback for continual improvement in environmental performance;

- Identify a range of mitigation measures which could reduce and mitigate the potential impacts to minimal or insignificant levels;
- Detail specific actions deemed necessary to assist in mitigating the environmental impact of the project;
- Identify measures that could optimize beneficial impacts;
- Create management structures that addresses the concerns and complaints of I&APs with regards to the development;
- Establish a method of monitoring and auditing environmental management practices during all phases of the activity;
- Ensure that safety recommendations are complied with;
- Specify time periods within which the measures contemplated in the EMPr must be implemented, where appropriate.

TFR is responsible for ensuring adherence to the conditions detailed in the EMPr. The project manager, contractor(s) etc., are all bound by the EMPr and must use this document as a guide to avoid, minimize and manage environmental impacts.

1.3 Structure of the EMPr

An EMPr is focused on sound environmental management practices, which will be undertaken to minimise adverse impacts on the environment through the lifetime of a development. In addition, an EMPr identifies what measures will be in place or will be taken to manage any incidents and emergencies that may occur during construction and operation of the facility or infrastructure. The content of the current EMPr is consistent—with the requirements as set out in the EIA regulations as stated below:

According to the EIA Regulations (GN R326, April 2017), an EMPr must include:

- 1. Details of -
- I. The person who prepared the environmental management programme; and
- II. The expertise of that person to prepare an environmental management programme;
 - Description of impact management outcomes or mitigation, including management statements, identifying the impacts and risks that need to be avoided, managed and mitigated through the environmental impact assessment process for all phases of the development including of –
- I. Planning and Design, Pre-construction and Construction activities;
- II. Rehabilitation of the environment after construction and where applicable post closure; and
- III. where relevant, operation activities;
 - 3. A detailed description of the aspects of the activity that are covered by the draft environmental management programme;
 - 4. An identification of the persons who will be responsible for the implementation of the measures;
 - 5. Proposed mechanisms for monitoring compliance with and performance assessment against the environmental management programme and reporting thereon;
 - 6. As far as is reasonably practicable, measures to rehabilitate the environment affected by the undertaking of any listed activity or specified activity to its natural or predetermined state or to a land use which conforms to the generally accepted principle of sustainable development, including, where appropriate, concurrent or progressive rehabilitation

measures;

- 7. A description of the manner in which it intends to –
- Modify, remedy, control or stop any action, activity or process which causes pollution or environmental degradation;
- II. Remedy the cause of pollution or degradation and migration of pollutants;
- III. Comply with any prescribed environmental management standards or practices;
- IV. Comply with any applicable provisions of the Act regarding closure, where applicable;
- V. Comply with any provisions of the Act regarding financial provisions for rehabilitation, where applicable;
 - 8. Time periods within which the measures contemplated in the draft environmental management programme must be implemented;
 - 9. The process for managing any environmental damage, pollution pumping and treatment of extraneous water or ecological degradation as a result of undertaking a listed activity;
 - 10. An environmental awareness plan describing the manner in which –
 - The applicant intends to inform his or her employees of any environmental risk which may result from their work; and
- I. Risks must be dealt with in order to avoid pollution or the degradation of the environment; Where appropriate, closure plans including closure objectives.

1.4 Legal Framework and Components of the EMPr

The implementation of an EMPr for a listed activity is a requirement of in the provisions for Duty of Care and remediation of environmental damage contained in Section 28 of the NEMA. As such, failure to comply with this EMPr will constitute an offence and the Applicant and/or their Contractor may be liable for penalties and/or legal action. Therefore, it is important for all the responsible parties to understand their duties and undertake them with duty and care. This EMPr, which forms an integral part of the contract documents, informs the project team as to their duties in the fulfillment of the project objectives, with particular reference to the prevention and mitigation of environmental impacts caused by construction activities associated with the project. The team should note that obligations imposed by the approved EMPr are legally binding in terms of environmental statutory legislation and in terms of the additional conditions to the general conditions of contract that pertain to this project. In the event that any rights and obligations contained in this document contradict those specified in the standard or project specifications then the latter shall prevail.

Construction should be done in compliance with South African national and provincial environmental legislation, including associated regulations and all local by-laws relevant to the project. The list of applicable legislation provided below is intended to serve as a guideline only and is not exhaustive: -

- The Constitution of the Republic of South Africa (Act 108 of 1996);
- National Environmental Management Act (Act 107 of 1998);
- National Environmental Management: Biodiversity Act (Act 10 of 2004);
- National Heritage Resources Act (Act 25 of 1999);
- National Environmental Management: Waste Act (Act 59 of 2008);
- National Water Act (Act 36 of 1998);
- Hazardous Substances Act (Act 15 of 1973);
- Major Hazard Installation Regulations 1998) in terms of the Occupational Health and Safety Act (Act 85 of 1993); and
- SANS Standards (SANS 10089:2003)

2. DETAILS AND EXPERTISE OF THE ENVIRONMENTAL ASSESSMENT PRACTITIONER (EAP)

2.1 Details of the EAP

This EMPr was prepared by Odwa Ntshanga of IKAMVA Consulting. In fulfillment of this requirement, provided below are the details of IKAMVA Consulting an independent environmental management consulting entity:

Company name: IKAMVA Consulting

Physical Address: No. 7 Baobab Street, Zwartkop X4, Centurion, 0181 Telephone:

Contact Number: 012 663 5310; Fax: 086 626 8914

Email: lisolomzi@kamva.co.za

Website: www.kamva.co.za

2.2 Expertise of the EAP

IKAMVA Consulting is an experienced company, which has a sound track record in providing Environmental Management services to individuals, Companies, Municipalities, and other Governmental and non- governmental organizations within the entire Republic of South Africa. The Company primarily specializes in assessing the impacts of development on the natural, social and economic environments. IKAMVA's core expertise lies in the fields of integrated environmental management, environmental management plans, environmental management systems, ecological assessments, environmental risk assessment, environmental auditing and monitoring, integrated coastal zone management, social impact assessment and state of environment reporting. Specific to Environmental Management Consulting, IKAMVA Consulting has multi-disciplinary team of consultants. The organization has undertaken major environmental projects since the year 2000 for the National Government, Provincial Government, Non-governmental organizations, private companies, District and Local Municipalities, and individual developers throughout South Africa.

Provided below is a short curriculum vitae (CVs) of the Environmental Assessment Practitioner who prepared the document.

Odwa Ntshanga (BSc Honours in Geography)

Odwa is the Environmental Consultant and researcher for IKAMVA Consulting with experience in Environmental Impact Assessments (EIAs), Integrated Waste Management Plans (IWMPs), Environmental Compliance Monitoring and Environmental Awareness Trainings. She has undertaken various Basic Assessments and Full EIAs for projects in Eastern Cape, Gauteng and Limpopo Provinces since the year 2018.

3. DETAILS OF THE PROPOSED ACTIVITY

3.1 Project Description

The new facility will consist of two 230 000L vertical above ground storage tanks contained in a bunded area. The storage tanks will be made of carbon steel and will be 12m in height, 5m in diameter. The foundation of the tanks will be made of concrete slab with flat lap welded floor projection plate. The diesel level in the tanks will be monitored by an automatic tank gauging system. A pump room will contain two centrifugal pumps and a motor control unit that will be used to pump diesel in and out of the storage tanks. A road and rail decanting area will be used to receive diesel fuel either by road trucks or rail tankers. Two refueling bays will be used to refuel the locomotives. Electrical power to the facility will come from the depots distribution kiosk (substation) to the facilities distribution board to power the motors, lights and computers at the facility. All the areas will be connected to a drainage system which leads to an oil separator before it reaches the depots effluent plant.

3.1.1 Infrastructure

Water supply

Water supply will be provided by the municipality through existing water supply system.

Sewerage

The proposed project will not require to be connected to a sewage line.

Road access

The site is will be accessed through Austin Street


Electricity

The site will be connected via the existing power line.


3.2 Property Description

Transnet SOC Limited intends to construct a new refueling facility and decommission the existing infrastructure develop at the Beaconsfield Depot.

Site Locality

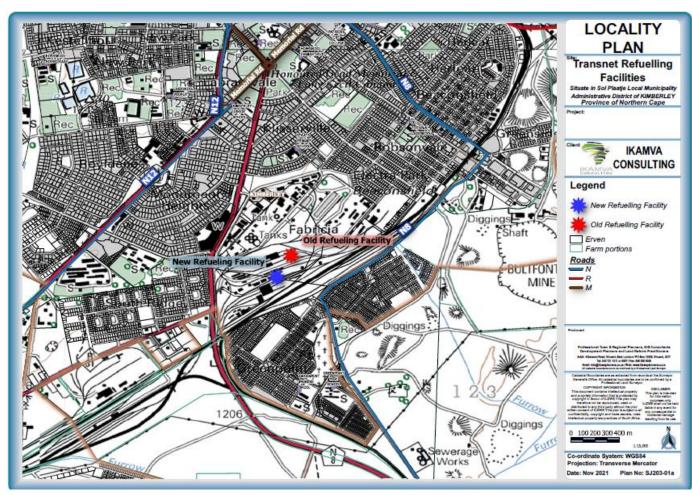

Site Layout Plan

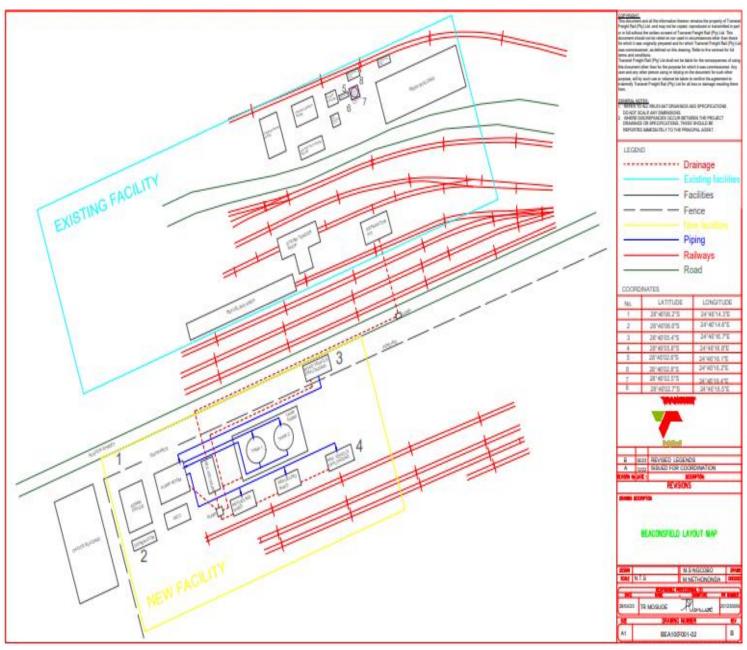

4. SCOPE OF THE EMPr

In order to ensure a holistic approach to the management of environmental impacts during the construction and operation of the storage tanks, this EMPr sets out the methods by which proper environmental controls are to be implemented by the project team. The EMPr is a dynamic document subject to influences and changes and are informed by variations to the provisions of the project specification.

4.1 Layout of the EMPr

The EMPr is divided into three phases of development. Each phase has specific issues unique to that period of the construction and operation of the development and associated infrastructure. The impacts are identified and given a brief description. The three phases of the development are identified as follows:

4.1.1 Planning and Design Phase

This section of the EMPr provides management principles for the planning and design phase of the project. Environmental actions, procedures and responsibilities as required from the Applicant during the planning and design phase are specified. These specifications will form part of the contract documentation and therefore the Contractor will be required to comply with these specifications to the satisfactory of the Project Coordinator and Environmental Control Officer.

4.1.2 Construction Phase

This section of the EMPr provides management principles for the construction phase of the project. Environmental actions, procedures and responsibilities required during the construction phase are specified. These specifications will form part of the contract documentation and therefore the Contractor will be required to comply with these specifications to the satisfactory of the Project Coordinator and Environmental Control Officer.

4.1.3 Operational and Maintenance Phase

This section of the EMPr provides management principles for the operation and maintenance phase of the project. Environmental actions, procedures and responsibilities required during the operation and maintenance phase are specified.

4.1.4 Closure and Post Closure Phase

The storage tanks are expected to be a permanent structure which will be maintained as part of the Maintenance Plan for Transnet Freight Rail.

5. ROLES AND RESPONSIBILITIES

It is a requirement of the EIA Regulations that an EMPr must include an identification of the persons who will be responsible for the implementation of the measures contemplated in this report. In order to ensure that the prescribed mitigation, rehabilitation and monitoring measures are effectively and efficiently implemented in all the relevant stages of the development, it is important to assign certain responsibilities to the specific managers thereof. The success of the implementation of the aims of this EMPr will not only depend on whether appropriate mitigation and rehabilitation measures have been correctly identified, but also on the level of commitment of all the responsible individuals to implement the recommendations which are proposed in this document.

5.1 The Applicant – Transnet SOC Ltd

As the project applicant, Transnet SOC Ltd, is ultimately responsible for ensuring compliance with the environmental specifications and upholding environmental commitment to 100% compliance with all National, Provincial and local legislation that relates to management of this environment.

The applicant's Project Manager and Project environmental must:

- A. Ensure the EMPr is in the tender documentation issued to prospective contractors:
- B. Appoint appropriately qualified contractors to co-ordinate, supervise and expedite different tasks;
- C. Ensure that all third parties who carry out all or part of the Applicant's obligations under the Contract comply with the requirements of this EMPr;
- D. Be responsible for obtaining any further environmental permits which are required for the design, construction and operation of the development;
- E. Ensure that all elements of the work undertaken are properly and competently directed, guided and executed at appointed stages of the project;
- F. Ensure the adherence to statutory safety, health and environment standards and ensuring the construction activities comply with the EMPr;
- G. Take overall responsibility and accountability for the site during the construction

phase;

- H. Manage the contractor's compliance and ensure documentation management;
- I. Ensure that the requirements as set out in this EMPr and by the relevant Authorities are adhered to and implemented;
- J. Appoint an independent ECO to monitor implementation of the EMPr;
- K. Assist the ECO in making decisions and finding solutions to environmental problems that may arise during the construction phase;
- L. Review and approve construction method statements with input from the ECO; and
- M. Issue of penalties for transgressions (including those of Environmental Specifications).

5.2 The Contractor

The Contractor is responsible for the overall execution of the activities envisioned in the construction phase including the implementation and compliance with recommendations and conditions of the EMPr. The successful Contractor shall:

- a) Be responsible for the overall implementation of the EMPr in accordance with the requirements of the contract;
- b) Ensure that all of its sub-contractors, employees, suppliers or agents etc. are fully aware of the environmental requirements detailed in the Environmental Specifications of this EMPr.
- c) Ensure that all third parties who carry out all or part of the Contractor's obligations under the Contract comply with the requirements of this EMPr;
- d) Liaise closely with the Implementing Agent to ensure that the works on site are conducted in an environmentally sensitive manner;
- e) Inform the Implementing Agent, as well as the ECO, should environmentally issues on site arise, e.g., dumping, pollution, littering and damage to vegetation; and
- f) Carry out instructions issued by the Engineer that are required to fulfill his/her compliance with the EMPr.

The Contractor must therefore ensure compliance with the EMPr at all times during construction activities and maintain an environmental register which keeps a record of all environmental incidents which occur on the site during construction development. These incidents may include:

- Public involvement / complaints;
- Health and safety incidents;
- · Incidents involving Hazardous materials stored on site; and
- Non-compliance incidents

The Contractor is also responsible for the implementation of corrective actions issued by the ECO and Project Manager/Project Environmental Specialist within a reasonable or agreed period of time.

5.3 Environmental Control Officer (ECO)

- a) For the purposes of implementing the conditions contained herein, an Environmental Control Officer (ECO) shall be responsible for the contract. The ECO shall be the responsible for ensuring that the provisions of the EMPr as well as the all the permits/ licenses are complied with during the construction period. The ECO's duties in this regard will include, inter alia, the following:
- b) Ensuring that all the environmental authorisations and permits required in terms of the applicable legislation have been obtained prior to construction commencing;
- Monitoring and verifying that the EMPr, permits and Contract are adhered to at all times and taking action if specifications are not followed;
- d) Monitoring and verifying that environmental impacts are kept to a minimum;
- e) Monitoring the undertaking by the Contractor of environmental awareness training for all new personnel on site;
- f) Ordering, via the Implementing Agent, the removal of, or issuing of spot fines for person/s and/or equipment not complying with the specifications of the EMPr and/or environmental authorisation;
- g) Checking the register of complaints kept on site and ensuring that the correct actions are/were taken in response to these complaints;
- h) Checking that the required actions are/were undertaken to mitigate the impacts

resulting from non-compliance;

- i) Conducting monthly environmental compliance audits in respect of the activities undertaken relating to the project. The monthly audit reports will be submitted to the Implementing Agent and the Contractor;
- j) Recommending additional environmental protection measures, should this be necessary; and
- k) Providing report back on any environmental issues at site meetings.

5.4 Competent Authority

The authorities in this project are the Department of Forestry, Fisheries and Environment (DFFE). The authorities are responsible for ensuring that the conditions of their respective authorisations are complied with, and that the monitoring of the EMPr and other authorisation documentations are carried out. This will be achieved by reviewing audit reports submitted by the ECO and conducting regular or random site visits.

5.5 TFR Environmental Specialist

The Environmental specialist is responsible for ensuring that the contractor (on behalf of TFR) complies with environmental regulations and that environmental approvals (i.e., EA, EMPr and WULA) are implemented on the construction site.

The Environmental Specialist will conduct the following tasks:

- Ensure that environmental issues receive adequate attention during construction.
- Approve (in consultation with the ECO) the contractor's SHE/Environmental file prior to the contractor going to site.
- Review and approve method statements prepared by the contractor to ensure alignment with the requirements set out in the EMPR.
- Offer support to the appointed SHE officer on site on environmental related issues.
- Conduct monthly/weekly observation & inspection of all work places based on the approved inspection checklist.

- Monitor the Contractor's compliance with EA and EMPr requirements.
- Ensure that site documentation (permits, EA, EMPr, CEMP, method statements, audit reports, waste disposal slips etc.) related to environmental management is maintained on the relevant Document Control System.
- Completion of Flash Reports for all Level 1 and 2 environmental incidents.
- Management of complaints register.
- Report environmental performance of the project on a monthly basis through relevant governance channel.

6. COMPLIANCE WITH THE EMPr

A copy of the EMPr must be kept on site at all times during the construction period. The EMPr will be binding on the main contractor and sub-contractors operating on the site and must be included within the Contractual Clauses. It should be noted that in terms of the National Environmental Management Act No 107 of 1998 (Section 28) those responsible for environmental damage must pay the repair costs both to the environment and human health; and the preventative measures to reduce or prevent further pollution and/or environmental damage (The 'polluter pays' principle).

6.1 Non-Compliance

The Contractor shall act immediately when a notice of non-compliance is received and take corrective action. Public complaints received regarding activities on the construction site pertaining to the environment shall be recorded in a dedicated register and the response noted with the date and action taken. The ECO should be made aware of any reported and registered public complaints. Any non-compliance with the agreed procedures of the EMPr is a transgression of the various statutes and laws that define the manner by which the environment is managed. Failure to redress the cause shall be reported to the relevant authority (DFFE) for them to deal with the transgression, as it deems fit.

The Contractor is deemed not to have complied with the EMPr if, inter alia:

- a) There is evidence of contravention of the EMPr specifications within the boundaries of the construction site;
- b) There is contravention of the EMPr specifications which relate to activities outside the boundaries of the construction site;
- c) Environmental damage ensues due to negligence; and
- d) Construction activities take place outside the defined boundaries of the site; and/or the Contractor fails to comply with corrective or other instructions issued by the Implementing Agent within a specific time period.

6.2 Penalties

Where environmental damage or a pollution incident is caused, and/or failure to comply with any of the environmental specifications contained in the EMPr, the contractor will be liable to pay a penalty fine. The following violations, and any others determined during the course of work, should be penalised:

- a) Littering on site;
- b) Lighting of illegal fires on site;
- c) Persistent or un-repaired fuel and oil leaks;
- d) Any persons, vehicles or equipment related to the Contractor's operations found within the designated "no-go" areas;
- e) Excess dust or excess noise emanating from site;
- f) Any vehicles being driven in excess of designated speed limits;
- g) Dumping in non-approved sites;
- h) Unauthorised removal/damage to indigenous vegetation;
- i) Uncontrolled/unmanaged erosion; and
- i) Pollution of water resources.

7. ENVIRONMENTAL SPECIFICATIONS: PRE- CONSTRUCTION, CONSTRUCTION AND OPERATION PHASES

This Chapter of the EMPr outlines the environmental specifications which are required to be implemented for the construction and operational phases of the project. The Environmental Specifications comprise clauses that are generally applicable to the undertaking of civil engineering works in areas where it is necessary to impose pro-active controls regarding the extent to which the construction activities impact on the environment.

The responsibility of implementing the EMPr lies with the proponent or the delegated person. The project management team has the responsibility of monitoring the contractor's compliance with all the project specifications. Specific to the EMPr, the ECO will have the responsibility of monitoring the compliance with environmental management specifications.

NR	IMPACT	MITIGATION MEASURES	RESPONSIBILITY	FREQUENCY	COMPLIANCE	
					YES	NO
Pre- C	onstruction Phase					
1.1.	Compliance with relevant legislation and policy	All relevant legislation and policy must be consulted and the proponent must ensure that the project is compliant with such legislation and policy.		Once off		
1.2.	Authorisations/Perm its/ Licenses	An Environmental Authorisation must be obtained prior to construction commencement.	ECO & TFR PM	Once off		
1.3.	General	The EMPr must be made a binding part of the contract.	TFR PM & ECO	Once off		
		The Proponent must appoint an ECO to oversee the environmental aspects of the project prior to the commencement of construction.	TFR PM	Once off		
		Employment of local labour, from the surrounding communities and the implementation of training is to be instituted during the time period of the contract.	TFR PM	Once-off		

		A Community Liaison Officer (CLO)	TFR PM	&		
		should be appointed by the contractor.	Contractor			
		This person should provide a bridge				
		between the local community, their				
		community councilors and the				
		consultant and contractor. It is				
		recommended that the CLO should be a				
		member of the community affected by				
		the project.				
1.4	Storm water	A storm water management plan must	TFR			
		be prepared for regular implementation	Environmental			
		and monitoring. Storm water outlets	Specialist	&		
		must be designed to have silt and litter	Contractor			
		traps.				

NR	IMPACT	MITIGATION MEASURES	RESPONSIBILITY FREQU	GATION MEASURES RESPONSIBILITY FREQUENCY	FREQUENCY	COMPLIA	NCE
					YES	NO	
Constru	ction Phase				l		
2.1	Permits and	A copy of the EMPr, environmental	ECO & TFR	Continuously			
	Licenses	authorization must be kept in the file on	Environmental				
		site and made available to any official of	Specialist				
		the Department on request.					
		These documents must be used as a					
		point of reference throughout the					
		project phases.					
		Any substantial changes to the EMPr		When			
		shall be submitted to DFFE for		necessary			
		acceptance before such changes may					
		be affected.					
2.2	Land use	The contractor shall not use the land	ECO & TFR	Continuously			
		forming the Site of, or connected with,	Environmental				
		the Works for any purpose whatsoever	Specialist				
		other than for the proper carrying out of					
		the Works under the contract and shall					
		place any camps that may be required					
		for himself and his employees only on					
		sites approved by the ECO and					

		Consulting Engineer.		
2.3	Site Establishment	To eliminate vegetation destruction, the	TFR	Once-Off
		construction camp/s must be placed in	Environmental	
		an area that is already disturbed and not	Specialist & ECO	
		sensitive		
		Before construction can begin, the	TFR PM &	Once Off, to be
		contractor shall submit to the Project	Contractor	amended when
		Manager for approval a site layout plan		necessary
		detailing plans of the exact location,		
		extent and construction details of these		
		facilities and the impact mitigation		
		measures the contractor proposes to put		
		in place. In particular, this plan must		
		include: -		
		Access routes including entry and exit		
		points.		
		All material and equipment storage		
		areas (including storage areas for		
		hazardous substance such as fuel and		
		chemicals).		
		Construction offices and other		
		structures.		

	Security requirements (including			
	temporary and permanent fencing, and			
	lighting) and accommodation areas for			
	security staff.			
	Detailed, electronic colour photographs	TFR PM 8	Once-off	
	shall be taken of the proposed site	Contractor		
	before any clearing may commence.			
	These records are to be kept by the			
	Project Manager for consultation during			
	rehabilitation of the site.			
	All servitudes and existing services must	TFR	Once-off	
	be verified prior to establishment.	Environmental		
		Specialist 8	4	
		Contractor		
	Throughout the period of construction,	Contractor	Continuously	
	the Contractor shall restrict all activities			
	to within the designated areas on the			
	approved construction layout plan. Any			
	relaxation or modification of the			
	construction layout plan is to be			
	approved by the Project Manager.			

2.4	Ablutions	Adequate ablutions should be supplied	Contractor & TFR	Continuously	
		for workers within the OHS regulations	PM		
		(i.e. 1 toilet per 30 workers, 1 shower per			
		15 workers). Such facilities shall be			
		maintained in a clean and hygienic			
		condition. Their use shall be strictly			
		enforced.			
		Safe and effective sewage treatment will	Contractor, ECO &		
		require one of the following sewage	TFR		
		handling methods: dry composting	Environmental		
		toilets such as "enviro-loos", or portable	Specialist		
		chemical toilets which are supplied and			
		maintained by the contractor.			
		Chemical toilets should be emptied			
		regularly. Weekly servicing of the			
		chemical toilets needs to be undertaken			
		and service records are to be kept in the			
		environmental file.			
		Toilets and latrines should be placed	Contractor, ECO &		
		within easy access of the workforce, to	TFR		
		ensure that the surrounding	Environmental		
		environment is not used for this	Specialist		
		purpose.			

		Toilets should be anchored.			
		Placement of toilets should avoid the			
		possibility of the area surrounding the			
		toilet becoming flooded.			
2.5.	Administration	An environmental management file shall	ECO & TFF	Continuously	
		be opened and maintained on site. The	Environmental		
		file must always be up-to-date with the	Specialist		
		following documentation:			
		Copy of Environmental Authorisation			
		Copy of EMPr			
		Copy of Approved Layout			
		Monthly Environmental Audits Reports			
		Spill Contingency Plan			
		Complaints Register			
		Incidents Register			
		Correspondences with ECO			
		Correspondence with			
		I&APs/stakeholders/surrounding areas			
		Proof of Waste Disposal			
		Proof of chemical toilet cleaning			
		Approved method statements			

2.6	Topsoil removal and	Topsoil	Contractor, ECO &	Continuously	
	stockpiling	All topsoil stockpiles shall be maintained	TFR		
		throughout the contract period in a	Environmental		
		weed-free condition. Weeds appearing	Specialists		
		on the stockpiled topsoil shall be			
		removed by hand. The topsoil stockpiles			
		shall be stored, shaped and sited in			
		such a way that they do not interfere			
		with the flow of water such that damming			
		or erosion is caused, or itself be eroded			
		through the action of water.			
		Soils contaminated with hazardous			
		substances shall be disposed of at a			
		licensed hazardous waste disposal site.			
		The Contractor shall be held responsible			
		for the replacement, at his own cost, for			
		any unnecessary loss of topsoil due to			
		failure to work according to the			
		approved progress plan.			
		Subsoil	Contractor, ECO &	Continuously	
		The subsoil is the layer of soil	TFR		
		immediately beneath the topsoil. This	Environmental		
		layer of soil shall be removed to a depth	Specialists		

		instructed by the Engineer, and stored separately from the topsoil if not used for construction purposes. During rehabilitation, this subsoil shall be replaced in the excavation in the original order it was removed			
2.7	Water (surface and groundwater)	Minimise the extent of cleared ground and hardened surfaces. Highlight all prohibited activities (e.g. Mixing of concrete in wetland areas littering, using the wetland as an ablution development) to workers through training and notices. The use of pesticides or herbicides on site should be avoided.	Contractor, ECO & TFR Environmental Specialists	Continuously	
2.8	Hazardous Substances	Potentially hazardous materials must be properly stored in a dry, secure environment, with concrete or sealed flooring. Hazardous substances are stored in the construction camp with lock and key. Chemical storage areas must be protected and bunded areas of a volume	Contractor & TFR Environmental Specialist	Continously	

equal to 110% of the volume of the
container storing the substance.
Spills in bunded areas must be cleaned
up, removed and disposed of safely
from the bunded area as soon after
detection as possible to minimize
pollution risk and reduced bunding
capacity.
Any oils, fuels and spilled substance
shall be removed and recycled or
disposed of at a licensed waste disposal
facility able to accommodate such
waste. Proof of waste disposal must be
kept in the environmental file.
Mixing/ decanting of all chemicals and
hazardous materials shall take place on
a tray or impermeable surface.
Contaminated water storage facilities
are not allowed to overflow and
appropriate protection from rain and
flooding shall be implemented.
In the event of a spillage/ incident that
cannot be contained and which poses a

NR	IMPACT	MITIGATION MEASURES	RESPONSIBILITY	FREQUENCY	COMPLIA	NCE
					YES	NO
2.9	Cement mixing and	No concrete mixing activities shall occur	Contractor & TFR	Continuously		
	concrete mixing	directly on the ground. Mixing trays shall	Environmental			
		be used at all mixing and supply points.	Specialist			
		All wastewater and runoff from concrete	Contractor & TFR	Continuously		
		mixing areas shall be strictly controlled,	Environmental			
		and cement contaminated water shall be	Specialist			
		collected, stored and disposed of at a				
		site approved by the ECO.				
		Unused cement bags are to be stored so	Contractor & TFR	Continuously		
		as not to be affected by rain or runoff	Environmental			
		events. Used bags shall be disposed of	Specialist			
		in the appropriate manner as approved				
		by the ECO.				
		All visible remains of excess concrete	Contractor & TFR	Continuously		
		shall be physically removed on	Environmental			
		completion of concrete pour section and	Specialist			
		disposed of. All excess aggregate shall				
		also be removed				

2.10	Solid waste -	Weatherproof and scavenger proof bins	Contractor & TFR	Continuously
	General Waste	shall be provided at the working area	Environmental	
		and emptied when full or at least once a	Specialist	
		week, whichever comes first.		
		No waste from construction or	Contractor & TFR	Continuously
		otherwise, may be disposed of on site.	Environmental	
		All waste generated on site, must be	Specialist	
		removed from the site and disposed of		
		at a licensed waste disposal site.		
		Solid waste shall be stored in a	Contractor & TFR	Continuously
		designated central area within the	Environmental	
		project area in covered, tip proof metal	Specialist	
		drums for later collection and disposal.		
		As far as possible, general waste		
		(including paper, glass, plastics,		
		aluminum, etc.) shall be sorted for		
		recycling.		
		No waste shall be burned anywhere else	Contractor & TFR	Continuously
		on the site, including at the approved	Environmental	
		solid waste disposal site.	Specialist	
		No littering by construction workers	Contractor & TFR	Continuously
		must be allowed. During the	Environmental	
		construction period, the site shall be	Specialist	
L		1	l .	1 1

	maintained in a neat and tidy condition			
	and must be kept free of litter. Fines			
	shall be implemented for persons found			
	littering			
	Measures shall be taken to reduce the	Contractor & TFR	Continuously	
	potential for litter and negligent	Environmental		
	behaviour with regard to the disposal of	Specialist		
	all refuse.			
	General waste shall be disposed of at	Contractor & TFR	Continuously	
	the registered municipal solid waste	Environmental		
	disposal site least once a week or when	Specialist		
	the waste receptacle is full			

NR	IMPACT	PACT MITIGATION MEASURES	RESPONSIBILITY	FREQUENCY	COMPLIANCE	
					YES	NO
	Solid Waste- Hazardous Waste	Hazardous waste (contaminated soil, etc.) shall be stored in secondary containers which are properly labelled.	Contractor & TFR Environmental Specialist	Continuously		
		Used oil, lubricants and cleaning materials from the maintenance of vehicles and machinery should be collected in a holding tank and returned to the supplier or oil recycling centre or removed from site for disposal at approved waste disposal sites for hazardous materials	Contractor & TFR Environmental Specialist	Continuously		
		Safe disposal certificates to be obtained for all hazardous wastes leaving the site.	Contractor & TFR Environmental Specialist	Continuously		
		Hazardous waste shall not be stored or stockpiled in any area other than that designated on the construction site layout.	Contractor & TFR Environmental Specialist	Continuously		

Any contaminated soil should be removed, treated and replaced.	Contractor & TFR Environmental Specialist	Continuously	
Bund made of plastic material, covered with sand, or any impervious material shall be used around hazardous waste storage facility.	Contractor & TFR Environmental Specialist	Continuously	

NR	IMPACT	MITIGATION MEASURES	RESPONSIBILITY	FREQUENCY	COMPLIANCE	
					YES	NO
2.11	Noise	It must be ensured that noise levels are kept to a minimum during the construction phase	Contractor	Continuously		
		Noisy construction work should be completed in as short a time frame as possible in order to limit the longevity of these impacts	Contractor	Continuously		
		Measures must be implemented at the site to minimize the potential impacts by informing surrounding land users of unusually noisy activities such as blasting where applicable.	Contractor	Continuously		
		Should the contractor want to work at night or weekends, surrounding residents/businesses must be adequately informed.	Contractor	Continuously		

NR	IMPACT	MITIGATION MEASURES	RESPONSIBILITY	FREQUENCY	COMPLIANCE	
					YES	NO
2.12	Dust and odors	Dust generating construction activities must be avoided during strong winds.	Contractor	Continuously		
		Management (including storage, transport, handling and disposal) of hazardous substances that have the potential to become airborne during construction must be carefully controlled and managed	Contractor	Continuously		
		Suitable dust suppression measures must be implemented if dust levels rise above acceptable levels. Water or commercial dust suppressants can be used.	Contractor	Continuously		
		Sand and crushed stone stockpiles must be kept covered or have suitable dust palliative applied such as water or commercial dust suppressants.	Contractor	Continuously		

		Burning of waste on site or adjacent is forbidden.			
2.13		Clearing activities must only be undertaken during agreed working times and permitted weather conditions. If heavy rains are expected, clearing	Contractor	Continuously	
2.14	Soil an Sedimentation	Activities should be put on hold. In this regard, the contractor must be aware of weather forecasts.	Contractor	Continuously	
		Measures must be implemented such that erosion is minimized during construction and after construction. These measures may include: The suitable use of sand bags or Hessian sheets The prompt rehabilitation of exposed soil areas with indigenous vegetation to ensure that soil is protected from the elements; The removal of vegetation only as it becomes necessary for work to	Contractor	Continuously	

		proceed; therefore, the full length of the				
		works shall not be stripped of vegetation				
		prior to the commencing of other				
		activities.				
		Re-vegetation of the site and areas	Contractor	Continuously		
		outside of the site should be undertaken				
		immediately after the completion of an				
		activity in that area.				
		If re-vegetation of exposed surfaces	Contractor	Continuously		
		cannot be established immediately due				
		to phasing issues, rows of straw, hay or				
		cut bundles of vegetation should be dug				
		into the soil in contours and/or sand				
		bags or silt fences must be established				
		along the contours at regular intervals to				
		slow runoff and capture eroded soil.				
		Effort must be made to ensure that the	Contractor	Continuously		
		stormwater system including pipes,				
		drains, headwall and Reno-mattresses				
		are not silted up during the construction				
		phase.				
L	l .	I .		1	l	

		After every rainfall event, the contractor	Contractor	Continuously	
		must check the site for erosion damage			
		and rehabilitate this damage			
		immediately. Erosion rills and gulleys			
		must be filled-in with appropriate			
		material and silt fences or fascine work			
		must be established along the gulley for			
		additional protection until grass has re-			
		colonised the rehabilitated area.			
2.15	Fauna Management	Feeding, trapping, poisoning, injuring or	Contractor	Continuously	
		killing of animals is strictly forbidden.			
		Animals found on site should be			
		removed to a natural area at least 500			
		metres from the site.			
		Any animal killed as a result of trapping	Contractor	Continuously	
		or hunting or found in the possession of			
		an employee of the Contractor will result			
		in that employee being removed from			
		site for the duration of the Contract and			
		actions taken against that particular			
		person.			

		All areas outside the access routes and the working area are to be treated as 'No Go' zones.	Contractor	Continuously
		Open excavations should be fenced off at the end of each day to protect domestic and wild animals from getting injured.	Contractor	Continuously
		The use of pesticides must be avoided wherever possible.	Contractor	Continuously
2.16	Indigenous Flora	The natural vegetation encountered on the site is to be conserved and left as intact as possible.	Contractor & TFR Environmental Specialist	Continuously
		Re-vegetation of disturbed areas must be undertaken with site indigenous species and in accordance with the instructions issued by the ECO.	Contractor & TFR Environmental Specialist	Post Construction phase
		Only vegetation directly affected by the works and such others as may be indicated by the ECO in writing may be cleared.		

The	Contractor shall	ensure that	Contractor	Continuously	
mad	hinery and vehicles	shall not be			
drive	en on any area otl	her than the			
ider	tified access roads.	Areas outside			
the	mpact zone are to be	designated as			
sens	sitive and therefore	no access to			
thes	e areas by construction	on contractors			
or e	quipment will be perm	itted.			
Veg	etation may only be	cleared within	ECO, Contractor &	Continuously	
dem	arcated work area an	d only when it	TFR		
is ne	ecessary;		Environmental		
			Specialist		
Re-	egetate exposed a	reas with a	Contractor	Post	
suita	able grass seed mix	of indigenous		Construction	
spe	cies upon completion o	of construction		phase	
activ	vities.				
Тор	soil and subsoil mu	st be stored	Contractor		
sepa	arately.				
The	prepared soils	along the			
cons	struction site must be	re vegetated			
via	hand broadcasting ar	nd plugs by a			
prof	essional. In addition,	any rescued			
indi	genous plants mu	st also be			

		replanted within the construction		
		footprint.		
		All protected and culturally important	Contractor & TFR	Pre-
		species should be marked; where	Environmental	Construction
		possible, permits should be obtained	Specialist & ECO	phase
		before removal.		
2.17	Alien Invasive	Patches of alien invasive vegetation that	Contractor & TFR	Continuously
	Vegetation	colonise parts of the site or its	Environmental	
		surroundings must be removed	Specialist	
		immediately. This must be done for the		
		duration of the construction phase.		
		Alien plant infestations must be	Contractor & TFR	Continuously
		controlled during and after construction.	Environmental	
		This will involve frequent mechanical	Specialist	
		removals with the correct disposal		
		procedures for each species;		
		The transportation of soils or other	Contractor & TFR	During
		substrates infested with alien species	Environmental	construction
		should be strictly controlled, particularly	Specialist	phase
		during the removal of any vegetation or		
		soil during construction;		

manufacture of the physical acceptant	
preferred to chemical control;	
All construction vehicles and equipment, During	
as well as construction material should construction	
be free of plant material. Therefore, all phase	
equipment and vehicles should be	
thoroughly cleaned prior to access on to	
the construction areas. This should be	
verified by the ECO;	
2.18 Fire Basic fire-fighting equipment must be Contractor & TFR Continuously	
available on site, within easy access and Environmental	
is to the satisfaction of the Health & Specialist	
Safety Officer. Fire extinguishers and	
fire beaters should be made available on	
site at all times.	
Fire equipment shall be serviced Contractor & TFR Continuously	
timeously. Environmental	
Specialist	
A staff member must be designated as Contractor & TFR	
a Fire Officer who shall be responsible Environmental	
for ensuring immediate and appropriate Specialist	
action in the event of a fire.	

		All site personnel must be made aware	Contractor & TFR		
		of the procedure to be followed in the	Environmental		
		event of a fire.	Specialist		
2.19	Heritage Resources	Construction personnel should be	Contractor	Pre-	
		informed before construction starts		Construction	
		about possible heritage or cultural			
		resources they could encounter and the			
		procedures to follow when encountering			
		these materials.			
		If a heritage resource (e.g. human	Contractor	During	
		remains, archaeological or		excavation	
		palaeontological artefact) is discovered		activities	
		during construction the following will			
		apply:			
		Work at the point of the discovery is to			
		cease immediately;			
		The point of discovery is to be clearly			
		demarcated to prevent unauthorized			
		removing or damage to the resource;			
		The South African Heritage Resources			
		Agency (SAHRA) is to be informed			
		immediately or within 24 hours of the			
		discovery;			

		A professional heritage specialist will be			
		consulted to assess the significance of			
		the find and to apply for the necessary			
		permits from SAHRA for the rescue			
		and/or destruction of these fossils.			
		Work shall not recommence until such			
		time as guidance from SAHRA has been			
		received.			
2.20	Health and Safety	General Health, Safety and Security	Contractor	Continuously	
		Ample signage including 'no smoking'			
		zones, safe eating areas,			
		etc. must be installed at the working			
		areas.			
		All construction personnel should			
		always wear protective clothing when			
		entering the working area. Protective			
		clothing should as a minimum include			
		safety boots, gloves, helmet and			
		overalls.			
		Protective clothing must be uniform (i.e.			
		workers issued overalls with company			
		name/logo, etc.) so as to distinguish			
		between construction workers and			

		trespassers. Construction work must adhere to all requirements of the Occupational Health and Safety Act (Act 56 of 2004) as amended.		
2.21	Social Impacts	A Complaints Register must be kept at the site office. This must be in a duplicate format, with numbered pages. The stakeholders need to be made aware of the register and the methods of communication available for them.	Continuously	

NR	IMPACT	MITIGATION MEASURES	RESPONSIBILITY	FREQUENCY	COMPL	IANCE
					YES	NO
3. Pos	t - construction					
3.1	Construction Camp	All structures comprising the	Contractor	On completion		
		construction camp are to be removed		of construction		
		from site.				
3.2	Pollution Control	Excavate all areas of contaminated	Contractor	On completion		
	Structures	substrate (e.g. from sumps used to		of construction		
		capture contaminated runoff from				
		concrete / cement mixing areas),				
		transfer the contaminated substrate to				
		an appropriate disposal site and treat				
		the affected areas with appropriate				
		ameliorants				
		Remove all plastic linings used for	Contractor	On completion		
		pollution control and transfer to		of construction		
		appropriate disposal site.				
		Break up all concrete structures that	Contractor	On completion		
		have been created (e.g. working and		of construction		
		parking surfaces) and remove concrete				
		waste to an appropriate disposal site.				

3.3	Waste	Remove all leftover construction	Contractor	On completion
		materials from the storage area and		of construction
		construction site and either sell, auction,		
		donate to the local community or		
		transfer to the Contractor's base. If		
		leftover materials are donated to the		
		local community, it is the Contractor's		
		responsibility to ensure that the		
		materials are used appropriately, and do		
		not cause harm to the environment.		
3.4	Alien Invasive	Existing and newly established alien	Contractor	Continuously
	Vegetation	vegetation must be removed from the		
		entire property and replaced, where		
		necessary, with suitable indigenous /		
		endemic grass species.		
		Any proclaimed weed or alien species		
		that germinates during the contract		
		period shall be cleared by hand before		
		flowering.		
3.5	Rehabilitation	The guiding principle for rehabilitation is		
		to restore the disturbed areas to at least		
		the same (but preferably better) level of		
		ecological functioning as they were		

	before the disturbance.		
	All damaged areas shall be rehabilitated		
	upon completion of the contract.		
	Rehabilitation must take place in a		
	phased approach as soon as possible.		
	The necessary drainage works and		
	anti-erosion measures must be		
	implemented and maintained.		
	Disturbed areas must be landscaped		
	(i.e. profiled so that they blend in with		
	the existing topography) and re-		
	vegetated with indigenous vegetation.		
	Grass seeds or sods may be considered		
	where the indigenous grass may initially		
	provide insufficient cover to prevent		
	erosion.		

	Re-vegetation of the disturbed areas is		
	aimed at approximating as near as		
	possible the natural vegetative		
	conditions prevailing prior to		
	construction or disturbance.		
	Rehabilitation process must make use		
	of species indigenous and endemic to		
	the area. Seeds from surrounding seed		
	banks can be used for re-seeding.		
	The site must be checked for erosion		
	damage and rehabilitation must be		
	undertaken immediately. Erosion rills		
	and gulleys must be filled-in with		
	appropriate material and silt fences or		
	fascine work must be established along		
	the gulley for additional protection until		
	grass has re-colonised the rehabilitated		
	area.		

		The contractor must undertake any maintenance that may be required as a result of erosion control measures not functioning correctly, and where vegetation has not taken to reseed these areas to prevent further			
3.6	Re-vegetation	environmental degradation. A meeting is to be held on site between the Engineer, ECO and the Contractor to approve all remediation activities and to ensure that the site has been restored to a condition approved by the Engineer. All areas of bare soil must be re-	Contractor	On completion	
		vegetated and rehabilitated using top soil and indigenous grass seeds /plugs. Re-vegetated areas may need to be watered to ensure plant growth and development.		of construction	
		The site should be contoured to ensure free flow of runoff and to prevent ponding of water.			

4. Oper	rational Phase			
4.1	Maintenance and Management of infrastructure and Services	should be checked and maintained, to	Contractor	Continuously
4.2	Storm water Management	Storm water system should be inspected and managed throughout the year. Waste and disposal structures should be maintained and emptied regularly. All drainage structures must be regularly		
4.3	Fauna	cleared of organic and inorganic debris. The site fence must be maintained to deter animals from entering.	Contractor	Continuously
4.4	Alien Invasive Vegetation	As part of the indigenous vegetation management programme, alien invasive vegetation must be removed immediately after being discovered and before flowering.		

		Rehabilitation or maintenance of the site			
		with non-indigenous vegetation			
		(including grass, shrubs and trees) must			
		be discouraged.			
4.5	Noise	All noise should be restricted to working	Contractor & TFR	Continuously	
		hours and working days where	Environmental		
		applicable.	Specialist		
4.6.	Solid waste	A sufficient number of waste colour	Contractor & TFR	Continuously	
		coded and labeled bins must be placed	Environmental		
		at strategic points around the site.	Specialist		
4.7.	Hazardous waste	Hazardous waste should be collected	Contractor & TFR	Continuously	
		and disposed of at a registered landfill	Environmental		
		site.	Specialist		
			Specialist		
		Waste separation into different			
		categories must be practiced on site.			

8. ENVIRONMENTAL AWARENESS TRAINING

The environmental awareness training features a unique learning approach that provides an individual knowledge and awareness building experience through an overview and basic knowledge of the environment. Some of the topics to be covered will include: air and water pollution, general and hazardous waste management, noise pollution, spillage management, storage of oil and fuel. The main purpose of the awareness is to make employees and everyone involved in the project to be aware of the environmental impacts that can be caused by the project and try to mitigate them.

9. AMENDMENTS TO THE EMPR

The EMPr is a living document. Any major issues not covered in the EMPr as submitted must be addressed as an addendum to the EMPr, submitted for approval prior to implementation.

ANNEXURE A

PROFOMA: PROTECTION OF THE ENVIRONMENT

To be signed by Contractor

Employe	r:	 	 	 	 	 	
Contract	Number:.	 	 	 	 	 	
Contract	Title :	 	 	 	 	 	

PROTECTION OF THE ENVIRONMENT

The contractor	will not be given	the right to	access the	site until	this form	has been	signed
I				as Co	ntractor, r	ecord as t	follows:

- I, the undersigned, do hereby declare that I am aware of the increasing requirement by society that construction activities shall be carried out with due regard to their impact on the environment.
- 2. In view of this requirement by society and a corresponding requirement by the Employer with regard to this contract, I will, in addition to complying with the letter of the terms of the contract dealing with protection of the environment, also take into consideration the spirit of such requirements and will, in selecting the appropriate employees, plant, materials, and methods of construction, in so far as I have the choice, include the analysis not only the technical and economic (both financial and with regard to time) aspects but also the impact on the environment of the options. In this regard, I recognize and accept the need to abide by the 'precautionary principle' which aims to ensure the protection of the environment by the adoption of the most environmentally friendly construction approach in the face of uncertainty with regard to the environmental implications of construction.
 - 3. I acknowledge and accept the right of.......to deduct, should they so wish, from any amounts due to me, such amounts (herein referred to as fines) as the Project Manager and Environmental Control Officer shall certify as being warranted in view of my failure to comply with terms of the Contract dealing with protection of the environment subject to the following;

EMPr for the proposed construction of a refueling facility and decommissioning of an existing facility at Beaconsfield Depot.

- The Project Manager and Environmental Control Officer, in determining the amount of such fine, shall take into account, inter alia, the nature of the offence, the seriousness of the impact on the environment, the degree of prior compliance/non-compliance, the extent of the Contractor's overall compliance with environmental protection requirements, and in particular, the extent to which he/she considers it necessary to impose a sanction in order to eliminate/reduce future occurrences.
- The Project Manager shall, with respect to any fine imposed, provide me with a written statement giving details of the offence, the facts on which the Resident Engineer and Environmental Officer has based his assessment and the terms of the Contract (by reference to specific clause) which has been contravened.

ANNEXURE B: ENVIRONMENTAL INCIDENT REGISTER

DATE:	File Ref:
NAME:	Copy to:
EXACT LOCATION	F INCIDENT:
SECTION 1: DESCRI	TION OF INCIDENT
SECTION 2: REMEDI	AL ACTION REQUIRED
Remedial Action Due	Date:
Confirmation of Imple	mentation: NameDate:
SECTION 3: RELEVA	IT DOCUMENTATION

SECTION 4: SIGNATUREs

Engineer:
Name:
Date:
Environmental Control Officer:
Name:
Date:

SECTION 5: DRAWING/SKETCH

Note: please attach extra pages if more space is required

Date	Complainant's	Contact Details	Nature of Complaint	Corrective Action	Completed
	Name				Action Date